



VILI 30w/50w/60w

# VILI

## LED POST TOP LIGHT



VILI 60w/80w/100w

■ **Superior Light Quality:** The anti-glare, textured polycarbonate lens ensures smooth, even light distribution without harsh glare, creating a comfortable and inviting atmosphere. It not only improves visibility but also reduces eye strain, perfect for public spaces or commercial areas.

■ **Focused, Efficient Lighting:** With LEDs strategically positioned at the head of the fixture, all light is directed downward, maximizing illumination where it's needed most. This design enhances outdoor visibility and minimizes wasted light, making it perfect for parking lots, walkways, and streets.

■ **Customizable Power & Color:** The fixture offers selectable wattage and Kelvin options (3000K, 4000K, 5000K), giving you complete control over brightness and color temperature. Tailor the lighting to meet specific outdoor needs while saving on energy costs, ensuring a perfect balance of performance and efficiency.

### PRODUCT DESCRIPTION

The VILI LED Post Top Light is a durable outdoor fixture designed for efficient lighting in public and commercial spaces. Its head-mounted LEDs focus all light downward for optimal coverage, while the textured Anti-glare polycarbonate lens reduces glare and ensures even distribution. With selectable wattage and Kelvin options, you can easily customize brightness and color to suit various outdoor settings like pathways, parking lots, or landscapes.

### MOUNTING

The fixture is specifically designed to be securely mounted on a 2 7/8" vertical tenon ensuring a stable and precise installation for optimal performance and alignment.



## FEATURES




CCT Select



Power Select



Photocell sensor



ADC12 Die casting

## CCT SELECT & POWER SELECT




## SPECIFICATIONS


Model	AF56X-YR-TRG7-PPG060-115 / AF56X-YR-TG7-PPG100-023
LED Chip	SMD 3030, Lumileds or Other LED Chips
Wattage	30W- 50W- 60W / 60W- 80W- 100W Power Selectable
CCT	3000K / 4000K / 5000K3CCT Selectable
Light Output	Max 6600lm / Max 11000lm 110 LM/W
Efficacy	(Can customize higher LM/W if needed)
AC Input Voltage	120-277V /277-480V
Light Distribution	Type V
Mounting Option	2 7/8" Vertical Tenon
Lens	Anti-Glare Polycarbonate Textured Diffuser Lens
Exclusive Feature(3)	3CCT / Power Tunable Available
Ambient Temperature	-40°C to +45°C(-40°F to +113°F)
Total Harmonic Distortion (THD)	<20%
Lifetime	50,000H
IP Rating	IP65
Warranty	5 years




## DIMENSIONS

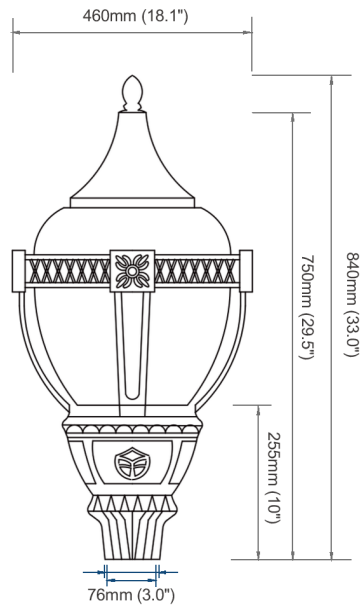


**30w/50w/60w**

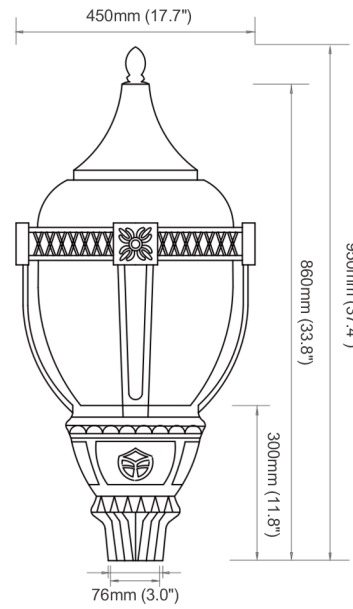

**60w/80w/100w**

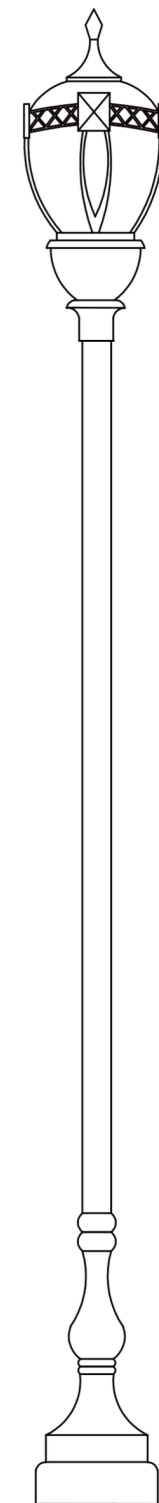


## LIGHT DISTRIBUTION

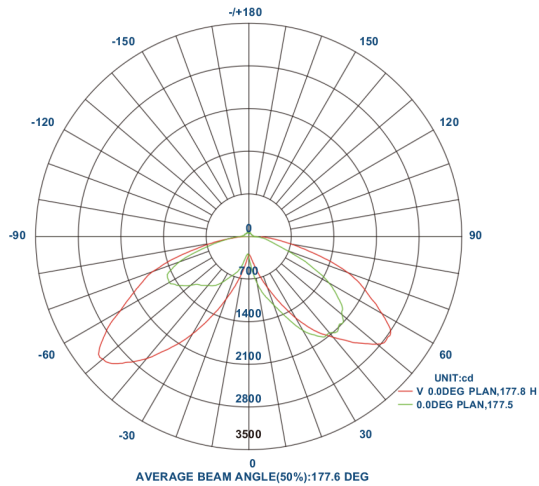




## INSTALLATION

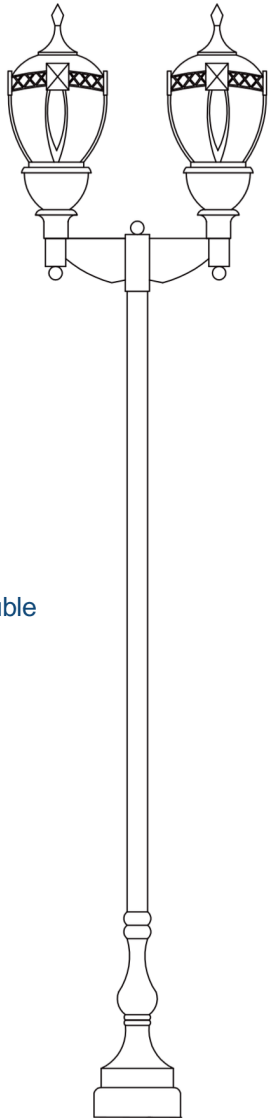

Double



Single



## PACKAGING INFORMATION

Wattage	Product Dimension (mm/ in)	Carton Box Dimension (mm/ in)	N.W (Kg/lb) (1pc)	G.W (Kg/lb) (1ctn)	qty/ctn
AF-YR-TPG7-W60- Pn-MTCP	18.10 x 18.10 x 33.00 in	21.26 x 21.26 x 35.24 in	6.2Kg(13.67lbs)	9.0Kg(19.80lbs)	1 PCS
AF-YR-TPG7-W100- Pn-MTCP	17.70 x 17.70 x 37.40 in	21.26 x 21.26 x 38.58 in	8.5Kg(18.74lbs)	11.8Kg(26.00lbs)	1 PCS

## CARTON BOX

